



DJB TRADING

Cell: 072 531 4188 [Benson]

Cell: 082 748 9116 [Louis]

Web: www.meteorledlight.co.za

Email: djbtrading.ct@gmail.com

Fax: 021-6713299

meteor
greener, brighter



Version: June 2012

Meteor LED Floodlight - 10W (230V)

Model:	MFL10-230V
LED Power:	10W
Input Voltage:	AC 220-240V
Light Colour:	Bright White
LED Numbers:	9
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	900LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	120°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Outer Casing:	Die-cast Aluminium
Glass Cover:	Tempered Glass
Working Life-span:	30000-50000 Hours
Net Weight:	0.6KG
Product Dimensions:	113*87*85mm
Full Replacement Guarantee:	18 Months
Recommended Replacements:	150W Halogen Floodlight



Meteor LED Floodlight - 10W (12V)

Model:	MFL10-12V
LED Power:	10W
Input Voltage:	DC 12V
Light Colour:	Bright White (6000K)
LED Numbers:	9
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	900LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	120°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Outer Casing:	Die-cast Aluminium
Glass Cover:	Tempered Glass
Working Life-span:	30000-50000 Hours
Net Weight:	0.6KG
Product Dimensions:	113*87*85mm
Full Replacement Guarantee:	18 Months



Accessories:




Meteor LED Floodlight - 20W

Model:	MFL20
LED Power:	20W
Input Voltage:	AC 220-240V
Source Frequency:	50-60Hz
Light Colour:	Bright White (6000K)
LED Numbers:	20
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	2000LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	120°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Outer Casing:	Die-cast Aluminium
Glass Cover:	Tempered Glass
Working Life-span:	30000-50000 Hours
Net Weight:	1.2KG
Product Dimensions:	180*140*100mm
Full Replacement Guarantee:	18 Months



Meteor LED Floodlight - 30W

Model:	MFL30
LED Power:	30W
Input Voltage:	AC 220-240V
Source Frequency:	50-60Hz
Light Colour:	Bright White (6000K)
LED Numbers:	30
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	3000LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	90°-120°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Outer Casing:	Die-cast Aluminium
Glass Cover:	Tempered Glass
Working Life-span:	30000-50000 Hours
Net Weight:	2.2KG
Product Dimensions:	224*184*128mm
Full Replacement Guarantee:	18 Months
Recommended Replacements:	500W Halogen Floodlight

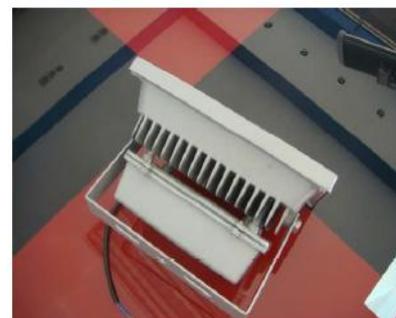

Meteor LED Floodlight - 50W

Model:	MFL50
LED Power:	50W
Input Voltage:	AC 220-240V
Source Frequency:	50-60Hz
Light Colour:	Bright White (6000K)
LED Numbers:	50
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	5000LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	90°-120°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Outer Casing:	Die-cast Aluminium
Glass Cover:	Tempered Glass
Working Life-span:	30000-50000 Hours
Net Weight:	3.6KG
Product Dimensions:	285*232*150mm
Full Replacement Guarantee:	18 Months
Recommended Replacements:	400W Mercury-Vapour Floodlight




Meteor LED Floodlight - 80W

Model:	MFL80
LED Power:	80W
Input Voltage:	AC 220-240V
Source Frequency:	50-60Hz
Light Colour:	Bright White (6000K)
LED Numbers:	80
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	8000LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	120°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Outer Casing:	Die-cast Aluminium
Glass Cover:	Tempered Glass
Working Life-span:	30000-50000 Hours
Net Weight:	6KG
Product Dimensions:	290*360*220mm
Full Replacement Guarantee:	18 Months
Recommended Replacements:	400W Mercury-Vapour Floodlight



Meteor LED Floodlight - 100W

Model:	MFL100
LED Power:	100W
Input Voltage:	AC 220-240V
Source Frequency:	50-60Hz
Light Colour:	Bright White (6000K)
LED Numbers:	100
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	10000LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	120°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Outer Casing:	6063 Aluminium
Glass Cover:	Tempered Glass
Working Life-span:	30000-50000 Hours
Net Weight:	7.48KG
Product Dimensions:	360*290*230mm
Full Replacement Guarantee:	18 Months
Recommended Replacements:	400W Metal-Halide Floodlight

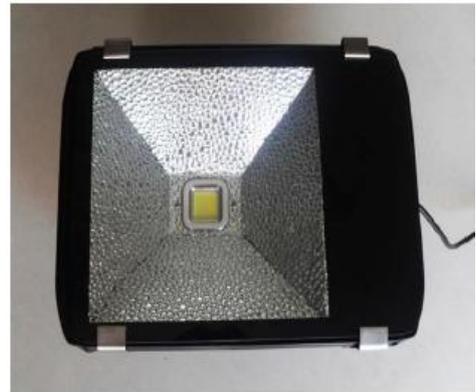

Meteor LED Floodlight - 140W / 200W

Model:	MFL140 / MFL200
LED Power:	140W / 200W
Input Voltage:	AC 220-240V
Source Frequency:	50-60Hz
Light Colour:	Bright White (6000K)
LED Numbers:	2x70 / 2x100
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	14000LM / 20000LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	120°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Outer Casing:	6063 Aluminium
Glass Cover:	Tempered Glass
Working Life-span:	30000-50000 Hours
Net Weight:	11.47KG
Product Dimensions:	605*290*230mm
Full Replacement Guarantee:	18 Months
Recommended Replacements:	400W Metal-Halide Floodlight



Meteor LED Floodlight - 300W

Model:	MFL300
LED Power:	300W
Input Voltage:	AC 220-240V
Source Frequency:	50-60Hz
Light Colour:	Bright White (6000K)
LED Numbers:	3x100
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	30000LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	120°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Outer Casing:	6063 Aluminium
Glass Cover:	Tempered Glass
Working Life-span:	30000-50000 Hours
Net Weight:	19KG
Product Dimensions:	750*290*230mm
Full Replacement Guarantee:	18 Months



Meteor LED Floodlight - 400W

Model:	MFL400
LED Power:	400W
Input Voltage:	AC 220-240V
Source Frequency:	50-60Hz
Light Colour:	Bright White (6000K)
LED Numbers:	4x100
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	40000LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	120°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Outer Casing:	6063 Aluminium
Glass Cover:	Tempered Glass
Working Life-span:	30000-50000 Hours
Net Weight:	23KG
Product Dimensions:	920*290*230mm
Full Replacement Guarantee:	18 Months



Meteor Marine LED Floodlight - 10W (230V)

Model:	MMFL10-230V-NG/WG
LED Power:	10W
Input Voltage:	AC 220-240V
Source Frequency:	50-60Hz
Light Colour:	Bright White (6000K)
LED Numbers:	9
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	900LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	120°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Paint:	Double Powder Coated
Outer Casing:	Die-cast Aluminium
Glass Cover:	Tempered Glass
Grid, Bracket & Wingnuts:	A4 Stainless Steel
Washers:	Fiber Washers
Working Life-span:	30000-50000 Hours
Net Weight:	0.8KG
Product Dimensions:	113*87*85mm
Full Replacement Guarantee:	18 Months


(without grid) / (with grid)



Meteor Marine LED Floodlight - 20W

Model:	MMFL20-NG/WG
LED Power:	20W
Input Voltage:	AC 220-240V
Source Frequency:	50-60Hz
Light Colour:	Bright White (6000K)
LED Numbers:	20
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	2000LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	120°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Paint:	Double Powder Coated
Outer Casing:	Die-cast Aluminium
Glass Cover:	Tempered Glass
Grid, Bracket & Wingnuts:	A4 Stainless Steel
Washers:	Fiber Washers
Working Life-span:	30000-50000 Hours
Net Weight:	1.4KG
Product Dimensions:	180*140*100mm
Full Replacement Guarantee:	18 Months


(without grid) / (with grid)

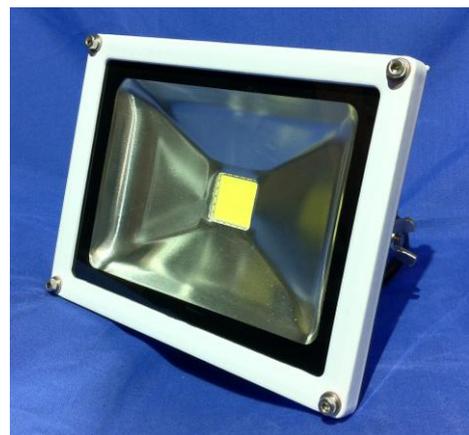

Meteor Marine LED Floodlight - 30W

(without grid) / (with grid)

Model:	MMFL30-NG/WG
LED Power:	30W
Input Voltage:	AC 220-240V
Source Frequency:	50-60Hz
Light Colour:	Bright White (6000K)
LED Numbers:	30
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	3000LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	90°-120°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Paint:	Double Powder Coated
Outer Casing:	Die-cast Aluminium
Glass Cover:	Tempered Glass
Grid, Bracket & Wingnuts:	A4 Stainless Steel
Washers:	Fiber Washers
Working Life-span:	30000-50000 Hours
Net Weight:	2.4KG
Product Dimensions:	224*184*128mm
Full Replacement Guarantee:	18 Months

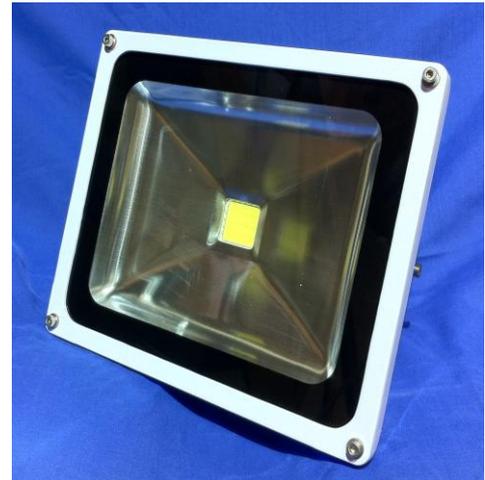

Meteor Marine LED Floodlight - 50W

(without grid) / (with grid)

Model:	MMFL50-NG/WG
LED Power:	50W
Input Voltage:	AC 220-240V
Source Frequency:	50-60Hz
Light Colour:	Bright White (6000K)
LED Numbers:	50
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	5000LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	90°-120°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Paint:	Double Powder Coated
Outer Casing:	Die-cast Aluminium
Glass Cover:	Tempered Glass
Grid, Bracket & Wingnuts:	A4 Stainless Steel
Washers:	Fiber Washers
Working Life-span:	30000-50000 Hours
Net Weight:	3.9KG
Product Dimensions:	285*232*150mm
Full Replacement Guarantee:	18 Months



Meteor LED High Bay - 50W

Model:	MHB50
LED Power:	50W
Input Voltage:	AC 220-240V
Source Frequency:	50-60Hz
Light Colour:	Bright White (6000K)
LED Numbers:	50
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	5000LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	60°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Outer Casing:	6063 Aluminium
Cover:	Aluminium
Working Life-span:	30000-50000 Hours
Net Weight:	8KG
Package Dimensions:	475*475*475mm
Full Replacement Guarantee:	18 Months
Recommended Replacements:	250W Mercury-Vapour/High-Pressure-Sodium High Bay



Meteor LED High Bay - 100W

Model:	MHB100
LED Power:	100W
Input Voltage:	AC 220-240V
Source Frequency:	50-60Hz
Light Colour:	Bright White (6000K)
LED Numbers:	100
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	10000LM
Colour Temperature:	6000-6500K
Colour Rendering Index:	Ra>70
Luminous Beam Angle:	60°
Protection Level:	IP65
Operating Humidity:	10%-90%
Operating Temperature:	-35°C--50°C
Outer Casing:	6063 Aluminium
Cover:	Aluminium
Working Life-span:	30000-50000 Hours
Net Weight:	8.6KG
Package Dimensions:	530*530*670mm
Full Replacement Guarantee:	18 Months
Recommended Replacements:	400W Mercury-Vapour/High-Pressure-Sodium High Bay



**Meteor GU5.3 MR16 (i.e.: Ø50mm) Ceramic LED
Downlight - 3W**

(Non-dimmable)

Model:	MMR16CDL3-12-B/W-N
Lamp Holder Type:	GU5.3
LED Power:	3W
Input Voltage:	DC 12V
LED Chip Set:	American Bridgelux
Light Colour:	Bright White (6000K) / Warm White (3000K)
LED Numbers:	3
LED Luminous Efficiency:	130LM/LED
LED Initial Flux:	390LM
Luminous Beam Angle:	45°
Outer Casing:	Ceramic
Working Life-span:	30000-50000 Hours
Product Dimensions:	Ø50*55mm
Full Replacement Guarantee:	18 Months
*Compatibility:	Wire-wound Transformer or Meteor LED Driver
Recommended Replacements:	50W Halogen GU5.3 (12V) Downlight



**Meteor GU10 MR16 (i.e.: Ø50mm) Ceramic LED
Downlight - 3W**

(Dimmable)

Model:	MMR16CDL3-230-B/W-D
Lamp Holder Type:	GU10
LED Power:	3W
Input Voltage:	AC 220-240V
LED Chip Set:	American Bridgelux
Light Colour:	Bright White (6000K) / Warm White (3000K)
LED Numbers:	3
LED Luminous Efficiency:	130LM/LED
LED Initial Flux:	390LM
Luminous Beam Angle:	45°
Outer Casing:	Ceramic
Working Life-span:	30000-50000 Hours
Product Dimensions:	Ø50*62mm
Full Replacement Guarantee:	18 Months
Recommended Replacements:	50W Halogen GU10 (230V) Downlight



**Meteor AR111/PAR36 LED Lamp
- 7W**

**(Non-dimmable) / (Dimmable)
[External 230V to 12V transformer included]**

Model:	MAR111-7-B/W-N/D
Lamp Holder Type:	GU53
LED Power:	7W
Input Voltage:	AC 220-240V
Light Colour:	Bright White (6000K) / Warm White (3000K)
LED Numbers:	7
LED Luminous Efficiency:	100LM/LED
LED Initial Flux:	700LM
Luminous Beam Angle:	60°
Outer Casing:	Aluminium
Working Life-span:	30000-50000 Hours
Product Dimensions:	Ø111*55mm
Full Replacement Guarantee:	18 Months
Recommended Replacements:	50W Halogen AR111 Lamp



Meteor E27 Ceramic LED Light Bulb - 3W

(Dimmable)

Model:	ME27CLB3-B/W-D
Lamp Holder Type:	E27
LED Power:	3W
Input Voltage:	AC 220-240V
LED Chip Set:	American Bridgelux
Light Colour:	Bright White (6000K) / Warm White (3000K)
LED Numbers:	3
LED Luminous Efficiency:	130LM/LED
LED Initial Flux:	390LM
Outer Casing:	Ceramic
Working Life-span:	30000-50000 Hours
Product Dimensions:	Ø50*88mm
Full Replacement Guarantee:	18 Months
Recommended Replacements:	40-60W Incandescent Light Bulb or 10-15W CFL



Meteor E27 Ceramic LED Light Bulb - 5W

(Non-dimmable)

Model:	ME27CLB5-B/W-N
Lamp Holder Type:	E27
LED Power:	5W
Input Voltage:	AC 220-240V
LED Chip Set:	American Bridgelux
Light Colour:	Bright White (6000K) / Warm White (3000K)
LED Numbers:	5
LED Luminous Efficiency:	130LM/LED
LED Initial Flux:	650LM
Outer Casing:	Ceramic
Working Life-span:	30000-50000 Hours
Product Dimensions:	Ø60*80mm
Full Replacement Guarantee:	18 Months
Recommended Replacements:	60-80W Incandescent Light Bulb or 15-20W CFL

